


# K21-30 TSR

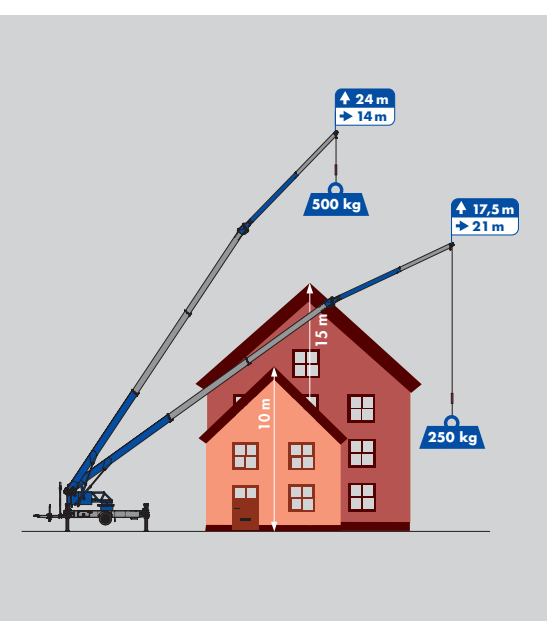

Hook height **29.8 m**/Extension length **30.7 m**

Max. hook load **1,500 kg**

**21 m** range with **250 kg**




# K21-30 TSR

## Equipment



TSR Mast system




H support



Fly jib joint



Dual luffing cylinders



Telescopic winch



Energy supply



Endless rotatable boom



Crane control system




Radio remote control



Drive concept



Full panelling




Retractable drawbar



Self-drive mechanism (opt.)



Accessory fix system (opt.)



Automatic set-up (opt.)


## Technical specifications

Hook load	1,500 kg
Hook height	29.80 m
Extension length	30.70 m
Support width (min.)	2.85 m
Support width (max.)	5.02 m
Winch pulling force	1,500 kg
Boom (1.500 kg)	5.46 m
Pull-out 1 (800 kg)	9.12 m
Vehicle dimensions	9.24 x 2.28 x 2.48 m
Towing capacity	3.5 t

## Work area

Load	Range	Height
1,500 kg	4.50 m	22.00 m
1,000 kg	8.00 m	20.80 m
800 kg	9.50 m	24.50 m
500 kg	14.00 m	24.00 m
250 kg	21.00 m	17.50 m

## Load diagrams

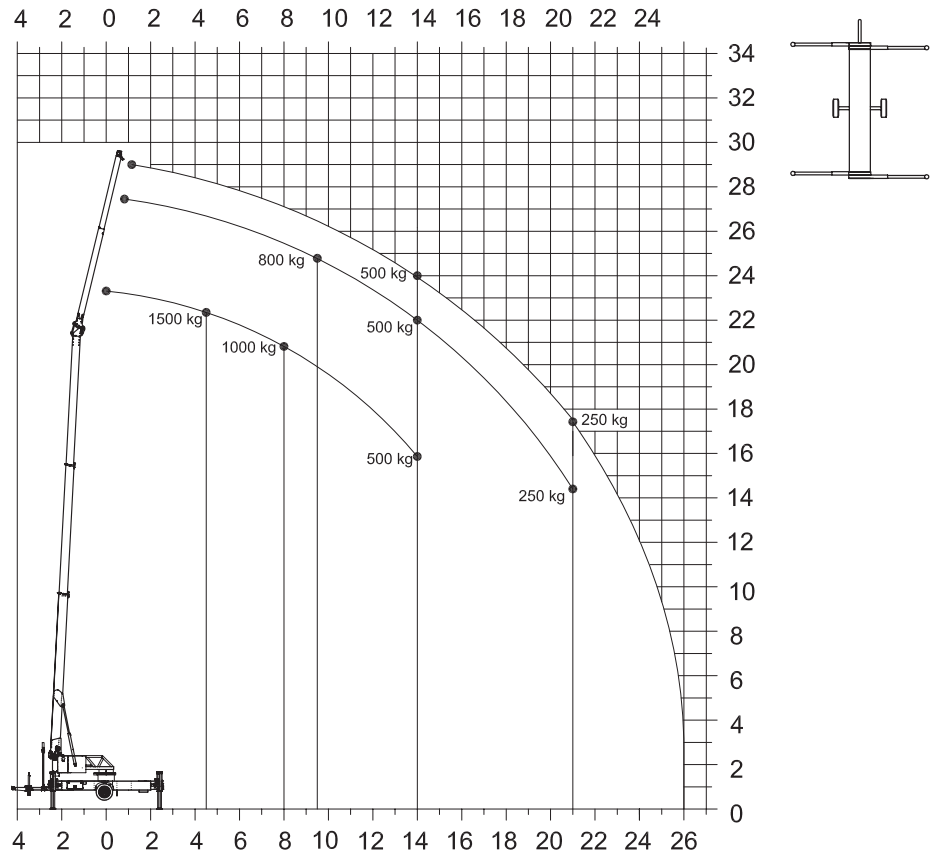

### KLAAS Service- & Vertriebs GmbH

Raiffeisenstraße 26 · D-59387 Ascheberg  
 Tel.: +49 (0) 2593-95 92-0  
 Fax: +49 (0) 2593-95 92-15  
 info@klaas.com