

MYGALE 23

ADVANTAGES

- From 0 to 23 m. in less than a minute.
- Manoeuvrability, simple controls.
- Easy access to hydraulic and electric components.
- Standardisation of componentss.


OPTIONS

- 220V AC power to platform.
- · Compressed air line.
- Flashing light.
- · Motion alarm.
- Anti crush system (A.C.S.).
- Special customer paint colour(s).

STANDARD FEATURES

- Non-marking rubber tracks.
- · Slinging rings.
- Overload sensor.
- Onboard colour LCD diagnosic console.
- Tilt indicator with buzzer.
- Hour meter.

 ϵ

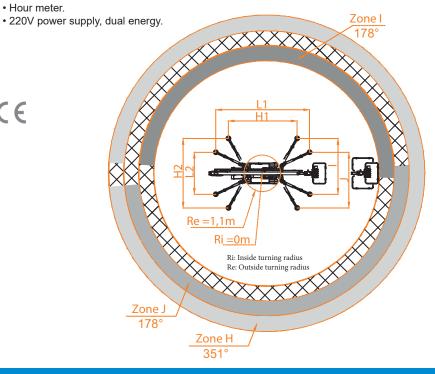

		MYGALE 23
A	Length	6,68 m
В	Width	1,19 m
С	Platform depth	0,73 m
D	Platform width	1,19 m
E	Height	1,93 m
F	Length (transport position)	5,54 m
G	Wheelbase	1,42 m
	Working height	22,85 m
	Platform height	20,85 m
	Min. floor height	0,39 m
	Horizontal reach	11,00 m
	Lift capacity	230 Kg
	Ground bearing pressure on tracks	136 kN/m²
	Max wind speed	45 Km/h
	Ground clearance centre	0,17 m
	Track (lxb)	0,72x0,23 m
	Surface with outriggers	3,97 x 3,92 m
	Max. slope (lengthways)	32 %
	Max.ground bearing pressure on levelling jacks	167 kN/m²
	Diesel engine	KUBOTA
	Fuel tank capacity	25 L
	Hydraulic tank capacity	60 L
	Weight	3450 Kg
	Power	12,5 kW @ 3600 tr/mn
	Wide stabilisation footprint (H1xH2)	3,92x3,97 m / 12,86x13,02 ft
	Stabilisation footprint wide and narrow (L1xI)	5,36x3,18 m / 17,58x10,43 ft
	Narrow stabilisation footprint (L1xL2)	5,36x2,40 m / 17,58x 7,87 ft

